



(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
02.06.2004 Bulletin 2004/23

(51) Int Cl.7: **H01R 12/16, H01R 12/04**

(21) Application number: **98100300.7**

(22) Date of filing: **09.01.1998**

(54) **Surface mount connector with integrated PCB assembly**

Oberflächenmontierbarer Verbinder mit integrierter Leiterplattenanordnung

Connecteur pour le montage sur une surface avec assemblage intégré de circuit imprimé

(84) Designated Contracting States:
BE DE FI FR GB NL SE

(30) Priority: **16.01.1997 US 784744**

(43) Date of publication of application:
22.07.1998 Bulletin 1998/30

(73) Proprietor: **BERG ELECTRONICS
MANUFACTURING B.V.
5222 AV s'-Hertogenbosch (NL)**

(72) Inventor: **Paagman, Bernardus L.
5481 RX Schijndel (NL)**

(74) Representative:
**Geissler, Bernhard, Dr.Jur., Dipl.-Phys. et al
Patent- und Rechtsanwälte
Bardehle . Pagenberg . Dost .
Altenburg . Geissler
Galileiplatz 1
81679 München (DE)**

(56) References cited:

EP-A- 0 591 772	EP-A- 0 627 788
EP-A- 0 752 739	WO-A-96/42123
WO-A-97/02627	US-A- 3 264 525
US-A- 4 836 791	US-A- 5 024 607
US-A- 5 060 369	US-A- 5 244 395
US-A- 5 549 481	US-A- 5 588 849
US-A- 5 593 322	

- **CARLISLE B: "SOLVING PROBLEMS WITH ELASTOMERIC CONNECTORS" MACHINE DESIGN, vol. 55, no. 27, November 1983 (1983-11), pages 87-91, XP002050786**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Background of the Invention

[0001] 1. **Field of the Invention:** The present invention relates to connectors and specifically to high speed, shielded connectors having one or more integrated PCB assemblies.

[0002] 2. **Brief Description of Prior Developments:** U.S. Patent No. 4,571,014 shows an approach for the manufacturing of backplane connectors using one or more PCB assemblies. Each of the PCB assemblies comprises one insulated substrate, one spacer, and one cover plate, all of which are attached to one another. The insulating substrate is provided with a predetermined pattern of conducting tracks, while ground tracks are provided between the conducting tracks. The conducting tracks are connected at one end to a female contact terminal for connection to the backplane and at the other end to a male through-hole contact terminal.

[0003] PCT Patent Application Serial No. US96/11214 filed July 2, 1996 and published 23 January 1997, also discloses connectors employing side-by-side circuit substrates. The connectors disclosed in that application also employ through-hole terminals to make a mechanically and electrically secure connection to the circuit board on which the connector is to be mounted.

[0004] While both of the above-mentioned connector arrangements can yield useful interconnection systems, many manufacturers of electronic equipment prefer to surface mount components on printed circuit boards. Surface mounting provides enhanced opportunities for miniaturization and the potential for mounting components on both sides of the circuit board. EP-A-0 752 739 discloses an electrical connector, according to the preamble of claim 1.

Summary of the Invention

[0005] The object of the present invention is to provide high speed connectors that can be surface mounted onto a receiving substrate.

[0006] Another object of the invention is to provide surface mount connectors having relatively low manufacturing costs. These objects are achieved with an electrical connector, according to claim 1.

[0007] These objects achieved in modularized connectors employing a plurality of conductive terminal traces by providing deformable conductive elements at the interface of the PCBs with the circuit substrate on which the connector is to be mounted. The conductive elements are received in one or more recesses in the edges the PCBs.

Recesses for receiving the deformable elements can also be present in the cover plates overlying each of the PCBs.

[0008] Second contact terminals may comprise press-fit or compliant section pins for additionally secur-

ing the connector on a circuit substrate and to hold the deformable elements against contact pads on the substrate. Such second contacts can form convertible terminals that can be press fitted or, upon reorientation, surface mounted on the substrate.

Brief Description of the Drawings

[0009]

Figure 1 shows in partial cross-section a connector illustrating the principles of the present invention; Figure 1a is an enlargement of the circled area of Figure 1;

Figure 2 shows a rear view of the connector shown in Figure 1;

Figure 3 is a partial bottom view of the connector shown in Figure 1;

Figure 4 is a partial isometric view of a PCB assembly according to the invention;

Figure 4a is a fragmentary view of a PCB assembly having a shield layer on the obverse side of the PCB;

Figure 5 is a partial cross-sectional view showing an alternative mounting of shield terminals on the PCB assembly of the connector shown in Figure 1; Figure 5a is an illustration of the circled area in Figure 5 with the shield/hold down terminal in an actual surface mount orientation;

Figure 6 is a rear view of the connector of Figure 5; Figure 7 is a front view of a hold down terminal used with the connector in Figure 5;

Figure 8 is a side view of the hold down terminal shown in Figure 7; and

Figure 9 illustrates a second form of mounting interface terminal.

Detailed Description of the Preferred Embodiments

[0010] It is to be understood that, although the figures illustrate right angle connectors, the principles of the present invention equally apply to other connector configurations.

[0011] Figures 1 and 2 show two views of a connector formed of a plurality of integrated PCB column modules 10. The modules 10 may comprise basically two elements, a printed circuit board (PCB) 12 and an insulative cover 14. The phantom lines in Figure 1 show the features of cover 14 in relation to elements of PCB 12.

[0012] Referring to Figure 1, the PCB assembly 10 comprises an insulating substrate 12 of a material commonly commercially used for making PCBs. The substrate 12 can be a substantially planar resin impregnated fiber assembly, such as is sold under the designation FR4, having a thickness 0.4 mm, for example. On a first surface of the substrate 12, a plurality of circuit or signal traces 16 are formed by conventional PCB techniques. Each trace 16 extends from a first portion of the sub-

strate 10, for example adjacent the front edge as shown in Figure 1, to a second area or region of the substrate 10, such as the bottom edge as shown in Figure 1. The traces 16 may include contact pads at one end adapted to have metal terminals secured to them, as by conventional surface mounting techniques using solder or welding. A plurality of ground or shielding traces 18 may also be applied to the substrate 10. The shielding traces 18 may be disposed between each of the circuit traces 16 or between groups of such traces. A terminal, such as a contact terminal 20 is mounted at the first end of each trace 16. Board mounting terminals 22, described in greater detail below, are disposed at the second end of each circuit trace 16. An additional shielding or ground layer 24 may be applied to the remainder of the trace bearing side of substrate 12. A ground or shield terminal 28 is fixed onto the ground layer 24.

[0013] The contact structures 22 comprise surface mount terminals for electrically interconnecting each of the traces 16 with a circuit trace printed on the circuit substrate (not shown) onto which the connector is to be mounted. In a preferred arrangement, the contact structures 22 include a compressible or deformable element 30 formed of an elastomeric material. The element 30 may be circular in cross-section (as shown), D-shaped or another appropriate shape. The member 30 can be a continuous, elongated member that extends between several PCB modules, as shown (in Figure 3), along aligned edges. In this case, the member has alternating non-conductive regions 32 and conductive regions 34, which can be formed by metallized coatings. The conductive regions are generally aligned with the centerlines of the contacts 20. In this manner, the row pitch of the connector at the mating interface is carried through to the contact pitch at the mounting interface. Along an edge 38 of the PCB 12 adjacent the ends of tracks 16, are suitably shaped recesses or notches 36, that may, for example, have a trapezoidal form as in Fig. 1a or a circular form, as shown in Figure 4a. The compressible member 30 is received in and retained, as by a push fit, in the notches 36 with a portion extending beyond edge 38. This arrangement provides a mounting interface with good coplanarity. The inside surfaces 36a of each notch 36 are metallized, preferably by a coating that is continuous with the circuit trace 16. If a shield or ground layer 37 (Figure 4a) is present on the obverse side of PCB 12, the shield should be spaced from the notch 36, so that the notch remains electrically isolated from the shield layer, as is shown in more detail below. The covers 14 are similarly notched to accept the compressible member 30. The conductive sections 34 are arranged so that one end portion extends into the notch 36 and is in electrical contact with the plating on the interior surfaces 36a of the notch.

[0014] Each PCB module 10 preferable includes a hold-down for holding a connector formed from a plurality of such modules on a circuit substrate. In Figure 1, the press-fit terminal 28 comprises such a hold-down.

As well, the location peg 71 and hold-down pegs 73 of the housing 70 can be utilized to provide hold down or board retention functions. When the connector is pressed onto the receiving circuit substrate and the terminals 28 are pressed into holes on the circuit substrate, the portion of each element 30 extending beyond edge 38 is compressed. This compression creates normal forces that press the conductive portions 34 against the conductive traces on the mounting substrate and the surfaces 36a of the notches. As a result, a secure electrical connection is made between signal traces 16 and corresponding circuit traces on the mounting substrate.

[0015] The compressible members 30 can also comprise metallic elements, for example, elastically deformable spring contacts or non-elastically deformable metal contacts. Further, the compressible members 30 can comprise individual conductive elements, each one being associated with one of the notches 36. For example, the member 30 may comprise an elastically deformable, conductive spherical element or a heat deformable element, such as a solder ball (described below).

[0016] A locating hole 40 may be placed in the substrate 12. The locating hole 40 preferably comprises a plated through-hole for establishing electrical connection with a metallic shield layer 37 (see Figure 4a) extending across the back surface of the substrate 12. As also previously described, small vias (not shown) forming plated through-holes may be disposed in each of the ground tracks 18 so that the ground tracks 18, the shield layer 24 and the back shield layer 37 form a shielding structure for the signal traces 16 and associated terminals.

[0017] As shown in Figure 1, contact terminals 20 are formed as a one-piece stamping and can comprise a dual beam contact defining an insertion axis for a mating terminal, such as a pin from a pin header.

[0018] A terminal module 10 is formed by associating a PCB assembly 12 with a cover 14. The cover 14 and PCB 12 are configured and joined substantially in the same manner as described in the above-referenced PCT patent application. The terminals 28 are located in the contact recesses 42 in covers 14. If the board mounting terminal 28 is of a type that is likely to have a relatively high axial insertion force applied to it as the terminal is pushed into a through hole on the mounting substrate, such as a press-fit terminal, the surface 42a (Figure 1) of the recess 42 is advantageously located so that it bears against the upturned tang 28a of the terminal 28. As previously noted in the above-identified PCT application, this arrangement allows the insertion force applied to the connector to be transmitted to terminal 28 through cover 14 in a manner that minimizes shear stress on the connection between terminal 28 and PCB 12.

[0019] Figure 2 shows a rear view of a connector comprising a molded plastic housing 70 and a plurality of PCB modules 10 in side-by-side relationship. In the connector shown in Figure 2, the circuit boards 12 are lo-

cated in back to back relationship, so that corresponding signal pairs (the location of which is shown schematically by small squares 11) can be arranged in twinax pairs. However, other shielded or non-shielded signal contact arrangements can be used. The PCB modules 10 are secured in housing 70, preferably by upper and lower dove tail ribs 66 and 64, respectively, formed in each of the covers 14. The ribs 66 and 64 are received in upper and lower dove tail grooves 68 and 65, respectively, formed on the inner top and bottom surfaces of housing 70. As illustrated in Figure 2, each circuit board includes a press fit terminal 28. The region of the bottom side of the connector at which the surface contact members 30 are located is flanked at one end by the retention pegs 73 and at the other by the press fit terminals 28, to ensure adequate compressive force for urging the members 30 against contact pads (not shown) on the mounting substrate.

[0020] Figure 4 is an fragmentary isometric view of a rear bottom corner of PCB 12 before terminals or conductive elements are associated with notches 36. It shows signal traces 16 that terminate at an edge of the board 12. Recesses 36 are formed at the edge of the PCB 12 and the surfaces 36a of the recesses are plated, so that there is electrical continuity between traces 16 and recesses 36. Referring to Figure 4a, if the PCB carries a shield layer 37 on the side opposite the side on which signal traces 16 and shield traces 18 are printed, the shield layer is spaced from recesses 36, for example, by the unplated regions 39.

[0021] Figure 5 shows a partial cross-sectional view of a connector having a convertible form of hold-down terminal 50. Figures 5 and 6 show the terminal 50 positioned for press fitting into a mounting substrate and Figure 5a shows how the terminal is positioned for surfacing mounting by being bent 90°. The terminals 50, shown in greater detail in Figures 7 and 8, have a mounting section 52 and compliant through-hole sections 54. The mounting section 52 includes a base 55 and a solder tab 56 disposed in substantially a right angle relationship with base 55. The mounting section 52 is joined to the compliant sections 54 by a reduced width neck section 53. The compliant section 54 comprises a pair of legs 58 that are movable inwardly when forces in the compliance direction of arrows F are imparted to legs 58 as it is inserted in a through-hole. As is known, elastic deformation of legs 58 creates a normal force that in turn creates a frictional force that opposes movement in the direction of the longitudinal axis of terminal 50 for retaining the terminal in a through-hole.

[0022] Each terminal 50 is mounted on an associated PCB by solder tab 56. Such mounting positions the planes of base 55 and compliant section 54 substantially transverse to the plane of the PCB. If the angle between base 52 and solder tab 56 is 90°, then the planes of base 52 and compliant section 54 will be substantially normal to the plane of PCB 12. An advantage of this positioning is that the terminal can readily be converted to a surface

mount terminal by bending the section 54 with respect to the base section 52 in the region of neck 53 as shown in Figure 5a. As a result, the section 54 can be bent 90° to be positioned substantially parallel to the surface of the circuit board to which the connector is mounted. This places the compliant section 54 in an orientation to be surface mounted on the connector-receiving circuit board. A strong solder attachment can be made because the solder meniscus can extend along and through the opening 57.

[0023] Another advantage of the terminal 50 is that it can be used as normal press fit terminals by soldering the base 55 onto the PCB 12, to position the compliant section 54 in the same orientation as terminal 28 shown in Figures 1 and 2. In this orientation the tab 56 functions in the same manner as tab 28a (Figure 1) to take the axial force applied to the terminals during board insertion.

[0024] In the foregoing description, the mounting interface terminals 22 have been described principally as elements that are deformable upon the application of force. The terminals 22 (Figure 1) can also comprise elements that are deformable upon the application of heat. In this regard, Figure 9 illustrates an embodiment wherein the conductive recesses or notches 36 in edge 38 of PCB 12 receive a heat deformable element 60.

[0025] The element 60 as shown is a generally cylindrical body of solder. Alternatively, the body 60 may be other shapes, for example, a spherical solder ball. The element 60 can be retained in recess 36 by a snap or friction fit, by solder paste, or by fusing the element 60 into notch 36, as by a reflow operation. An advantage of this embodiment is that connectors using this form of terminal at the mounting interface can be mounted without the need for a hold down arrangement that must maintain compressive forces, as in the previously described embodiment.

[0026] The term "surface mount" when used in the specification and claims with respect to the board mounting terminals or contacts 22 is meant to connect the absence of a through-hole type of connection and is not meant to refer solely to interconnections using solder or solder paste.

[0027] The foregoing constructions yield connectors with excellent high speed characteristics at low manufacturing costs. Although the preferred embodiment is illustrated in the context of a right angle connector, the invention is not so limited and the techniques disclosed in this application can be utilized for many types of high density connectors systems wherein signal contact are arranged in rows and columns.

[0028] While the present invention has been described in connection with the preferred embodiments of the various figures, it is to be understood that other similar embodiments may be used or modifications and additions may be made to the described embodiment for performing the same function of the present invention without deviating therefrom. Therefore, the present

invention should not be limited to any single embodiment, but rather construed in breadth and scope in accordance with the recitation of the appended claims.

Claims

1. An electrical connector comprising
 - a. at least one circuit substrate (12) having a first region and a second region;
 - b. a first contact (20) at said first region for establishing an electrical connection to a mating contact;
 - c. a second contact (22) at said second region for establishing a surface mount electrical connection to an electrical substrate onto which said connector is to be mounted; and
 - d. a conductor (16) extending from said first contact (20) to said second contact (22); **characterized in that**
 - e. said second contact (22) comprises a recess (36) at an edge (38) of said circuit substrate (12) for receiving a contact member (30) to establish said electrical connection to an electrical substrate; wherein the inside surface (36a) of said recess (36) is metallized.
2. The electrical connector according to claim 1, **characterized in that** said metallized inside surface (36a) is a coating continuous with said conductor (16).
3. The electrical connector according to claim 1 or 2, **characterized in that** said circuit substrate (12) comprises a shield layer (24) extending to said second region and a terminal member (28; 50) connected to said shield layer (24).
4. The electrical connector according to claim 3, **characterized in that** said terminal member (28) comprises a transversely compliant section wherein the compliance direction of said compliant section being transverse to a surface of said circuit substrate (12), and an upturned tang (28a) for receiving an insertion force applied to said electrical connector.
5. The electrical connector according to claim 4, **characterized in that** said transversely compliant section is moveable to a mounting position substantially parallel to an electrical substrate.
6. The electrical connector according to claim 3, **characterized in that** said terminal member (50) comprises a securing segment (56) for securing said terminal member (50) on said circuit substrate (12); a compliant section base (55) extending angularly from said securing segment (56); and a compliant section (54) extending from said compliant section base segment (55).
7. The electrical connector according to claim 6, **characterized in that** said compliant section base segment (55) and said compliant section (54) are disposed in substantially parallel planes and/or said compliant section (54) extends from a second edge of said compliant section base segment (55) adjacent a first contiguous edge of said compliant section base segment (55).
8. The electrical connector according to claim 6 or 7, **characterized in that** the angle between said securing segment (56) and said compliant section base segment (55) is about 90°.
9. The electrical connector according to one of the claims 6-8, **characterized in that** said compliant section (54) is adapted to be readily bent to the extent angularly from said compliant section base segment (55) to be alternately positionable for through-hole mounting or for surface mounting on an electrical substrate.
10. The electrical connector according to claim 1, **characterized in that** said contact member (30) comprises a compressible member.
11. The electrical connector according to claim 10, **characterized in that** said compressible member comprises an elastomeric material.
12. The electrical connector according to claim 11, **characterized in that** said compressible member comprises an elastomeric body bearing a conductive material.
13. The electrical connector according to claim 1, **characterized in that** said contact member (30) comprises a heat deformable member.
14. The electrical connector according to claim 13, **characterized in that** said contact member (30) is a solder body.
15. The electrical connector according to claim 1, **characterized by** comprising at least two circuit substrates (12) arranged substantially planar in a side-by-side relationship such that said recesses (36) are aligned to each other.
16. The electrical connector according to claim 15, **characterized in that** said contact member (30) is

deformable and comprises an elongated, continuous shape extending between said at least two circuit substrates (12).

17. The electrical connector according to claim 16, characterized in that said contact member (30) comprises alternating non-conductive regions (32) and conductive regions (34).

Patentansprüche

1. Ein elektrischer Verbinder aufweisend:

a. zumindest ein Leiterplattensubstrat (12), aufweisend einen ersten Bereich und einen zweiten Bereich;

b. einen ersten Kontakt (20) an dem ersten Bereich, zum Herstellen einer elektrischen Verbindung mit einem sich paarenden Kontakt;

c. ein zweiter Kontakt (22) an dem zweiten Bereich, zum Herstellen einer oberflächenmontierten elektrischen Verbindung an ein elektrisches Substrat, auf dem der Verbinder befestigt werden soll; und

d. ein Leiter (16), welcher sich von dem ersten Kontakt (20) zu dem zweiten Kontakt (22) erstreckt; **dadurch gekennzeichnet, dass**

e. der zweite Kontakt (22) einen Einschnitt (36) an einer Kante (38) des Leiterplattensubstrats (12) aufweist, um ein Kontaktglied (30) aufzunehmen, um die elektrische Verbindung mit einem elektrischen Substrat herzustellen, wobei die innere Oberfläche (36a) des Einschnitts (36) metallisiert ist.

2. Der elektrische Verbinder gemäß Anspruch 1, **dadurch gekennzeichnet, dass** die metallisierte innere Oberfläche (36a) eine kontinuierlich mit dem Leiter (16) ausgebildete Beschichtung ist.

3. Der elektrische Verbinder gemäß Anspruch 1 oder 2, **dadurch gekennzeichnet, dass** das Leiterplattensubstrat (12) eine Abschirmungsschicht (24) aufweist, welche sich zu dem zweiten Bereich erstreckt und ein Anschlussglied (28, 50), welches mit der Abschirmungsschicht (24) verbunden ist.

4. Der elektrische Verbinder gemäß Anspruch 3, **dadurch gekennzeichnet, dass** das Anschlussglied (28) einen querverlaufenden nachgiebigen Bereich aufweist, wobei die Nachgiebigkeitsrichtung des nachgiebigen Bereichs quer zu einer Oberfläche des Leiterplattensubstrats (12) verläuft, und eine

nach oben gebogene Lasche (28a) um eine Einfügekraft aufzunehmen, welche auf den elektrischen Verbinder aufgebracht wird.

5. Der elektrische Verbinder gemäß Anspruch 4, **dadurch gekennzeichnet, dass** der querverlaufende nachgiebige Bereich zu einer Montageposition beweglich ist, die im wesentlichen parallel zu einem elektrischen Substrat verläuft.

6. Der elektrische Verbinder gemäß Anspruch 3, **dadurch gekennzeichnet, dass** das Anschlussglied (50) ein Sicherungssegment (56) aufweist, um das Anschlussglied (50) auf dem Leiterplattensubstrat (12) zu sichern, eine Basis eines nachgiebigen Bereiches (55), die winklig von dem Sicherungssegment (56) absteht und einen nachgiebigen Bereich (54), der von dem Basissegment des nachgiebigen Bereiches (55) absteht.

7. Der elektrische Verbinder gemäß Anspruch 6, **dadurch gekennzeichnet, dass** das Basissegment des nachgiebigen Bereiches (55) und der nachgiebige Bereich (54) in im Wesentlichen parallelen Ebenen verteilt sind und/oder der nachgiebige Bereich (54) sich von einer zweiten Kante des Basissegments des nachgiebigen Bereiches (55) benachbart zu einer ersten angrenzenden Kante des Basissegments des nachgiebigen Bereiches (55) erstreckt.

8. Der elektrische Verbinder gemäß Anspruch 6 oder 7, **dadurch gekennzeichnet, dass** der Winkel zwischen dem Sicherungssegment (56) und dem Basissegment des nachgiebigen Bereiches (55) ungefähr 90° beträgt.

9. Der elektrische Verbinder gemäß einem der Ansprüche 6 bis 8, **dadurch gekennzeichnet, dass** der nachgiebige Bereich (54) angepasst ist, um leicht winklig von dem Basissegment des nachgiebigen Bereiches (55) gebogen zu werden, bis zu dem Ausmaß, um alternativ für eine Durchgangslochmontage oder für eine Oberflächenmontage auf einem elektrischen Substrat anordenbar zu sein.

10. Der elektrische Verbinder gemäß Anspruch 1, **dadurch gekennzeichnet, dass** das Kontaktglied 30 ein zusammengdrückbares Glied aufweist.

11. Der elektrische Verbinder gemäß Anspruch 10, **dadurch gekennzeichnet, dass** das zusammengdrückbare Glied ein elastomerisches Material aufweist.

12. Der elektrische Verbinder gemäß Anspruch 11, **dadurch gekennzeichnet, dass** das zusammengdrückbare Glied einen elastomerischen Körper aufweist, der ein leitendes Material trägt.

13. Der elektrische Verbinder gemäß Anspruch 1, **dadurch gekennzeichnet, dass** das Kontaktglied (30) ein wärmeverformbares Glied aufweist.
14. Der elektrische Verbinder gemäß Anspruch 13 **dadurch gekennzeichnet, dass** das Kontaktglied (30) ein Lötkörper ist.
15. Der elektrische Verbinder gemäß Anspruch 1, **dadurch gekennzeichnet, dass** er zumindest zwei Leiterplattensubstrate aufweist, die im Wesentlichen planar in einer Seiten-zu-Seiten-Beziehung angeordnet sind, so dass die Einschnitte (36) miteinander ausgerichtet sind.
16. Der elektrische Verbinder gemäß Anspruch 15, **dadurch gekennzeichnet, dass** das Kontaktglied (30) verformbar ist und eine längliche, kontinuierliche Form aufweist, die sich zwischen den zumindest zwei Leiterplattensubstraten (12) erstreckt.
17. Der elektrische Verbinder gemäß Anspruch 16, **dadurch gekennzeichnet, dass** das Kontaktglied (30) abwechselnd nicht-leitende Bereiche (32) und leitende Bereiche (34) aufweist.

Revendications

1. Connecteur électrique comprenant:
 - a. au moins un substrat de circuit (12) possédant une première région et une seconde région;
 - b. un premier contact (20) dans ladite première région pour établir une connexion électrique avec un contact apparié;
 - c. un second contact (22) dans ladite seconde région pour établir une connexion électrique de montage en surface sur un substrat électrique, sur lequel ledit connecteur doit être monté; et
 - d. un conducteur (16) qui s'étend depuis ledit premier contact (20) jusqu'audit second contact (22);

caractérisé en ce que

 - e. ledit second contact (22) comprend un renforcement (36) situé au niveau d'un bord (38) dudit substrat de circuit (12) pour recevoir un contact mobile (30) pour établir ladite connexion électrique avec un substrat électrique; la surface intérieure (36a) dudit renforcement (36) étant métallisée.
2. Connecteur électrique selon la revendication 1, **caractérisé en ce que** ladite surface intérieure métallisée (36a) est un revêtement continu avec ledit conducteur (16).
3. Connecteur électrique selon la revendication 1 ou 2, **caractérisé en ce que** ledit substrat de circuit (12) comprend une couche de protection (24) qui s'étend jusqu'à ladite seconde région et un élément formant borne (28; 50) connecté à ladite couche de protection (24).
4. Connecteur électrique selon la revendication 3, **caractérisé en ce que** ledit organe formant borne (28) comprend une section compliant transversalement, dans laquelle la direction de compliance de ladite section compliant est transversale par rapport à une surface dudit substrat de circuit (12), et une languette coudée vers le haut (28a) pour recevoir une force d'insertion appliquée audit connecteur électrique.
5. Connecteur électrique selon la revendication 4, **caractérisé en ce que** ladite section compliant transversalement est déplaçable jusque dans une position de montage essentiellement parallèle à un substrat électrique.
6. Connecteur électrique selon la revendication 3, **caractérisé en ce que** ledit organe formant borne (50) comporte un segment de fixation (56) pour fixer ledit organe formant borne (50) sur ledit substrat de circuit (12); une base de section compliant (55) s'étendant angulairement par rapport audit segment de fixation (56); et une section compliant (54) s'étendant à partir dudit segment de base (55) de la section compliant.
7. Connecteur électrique selon la revendication 6, **caractérisé en ce que** ledit segment de base (55) de ladite section compliant et ladite section compliant (54) sont disposées dans des plans essentiellement parallèles et/ou ladite section compliant (54) s'étend depuis un second bord dudit segment de base (55) de la section compliant, voisin d'un premier bord de configuration dudit segment de base (55) de la section compliant.
8. Connecteur électrique selon la revendication 6 ou 7, **caractérisé en ce que** l'angle entre ledit segment (56) et ledit segment de base (55) de la section compliant est égal à environ 90°.
9. Connecteur électrique selon l'une des revendications 6 à 8, **caractérisé en ce que** ladite section compliant (54) est adaptée pour être aisément coudée de manière à s'étendre angulairement à partir dudit segment de base (56) de la région compliant de manière à pouvoir être positionnée alternativement pour le montage dans un trou traversant ou pour le montage en surface sur un substrat électrique.




10. Connecteur électrique selon la revendication 1, **caractérisé en ce que** ledit élément de contact (30) comprend un élément compressible.
11. Connecteur électrique selon la revendication 10, **caractérisé en ce que** ledit élément compressible comprend un matériau élastomère. 5
12. Connecteur électrique selon la revendication 11, **caractérisé en ce que** ledit élément compressible comprend un corps élastomère portant un matériau conducteur. 10
13. Connecteur électrique selon la revendication 1, **caractérisé en ce que** ledit élément de contact (30) comprend un élément déformable sous l'action de la chaleur. 15
14. Connecteur électrique selon la revendication 13, **caractérisé en ce que** ledit élément de contact (30) est un corps en brasure. 20
15. Connecteur électrique selon la revendication 11, **caractérisé en ce qu'il** comprend au moins deux substrats de circuits (12) agencés de manière à être essentiellement plats dans une relation de disposition côte-à-côte de telle sorte que lesdits renforcements (36) sont alignés entre eux. 25
16. Connecteur électrique selon la revendication 13, **caractérisé en ce que** ledit élément de contact (30) est déformable et comprend une forme allongée continue qui s'étend entre lesdits au moins deux substrats de circuit (12). 30
17. Connecteur électrique selon la revendication 16, **caractérisé en ce que** ledit élément de contact (30) comprend alternativement des régions non conductrices (32) et des régions conductrices (34). 35



40

45

50

55

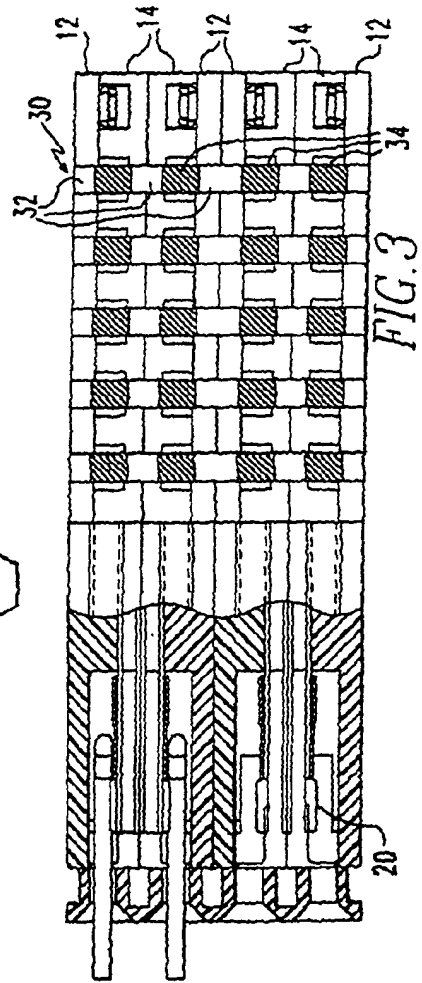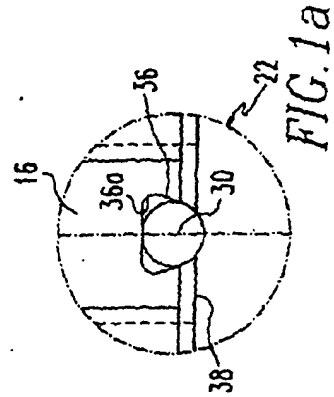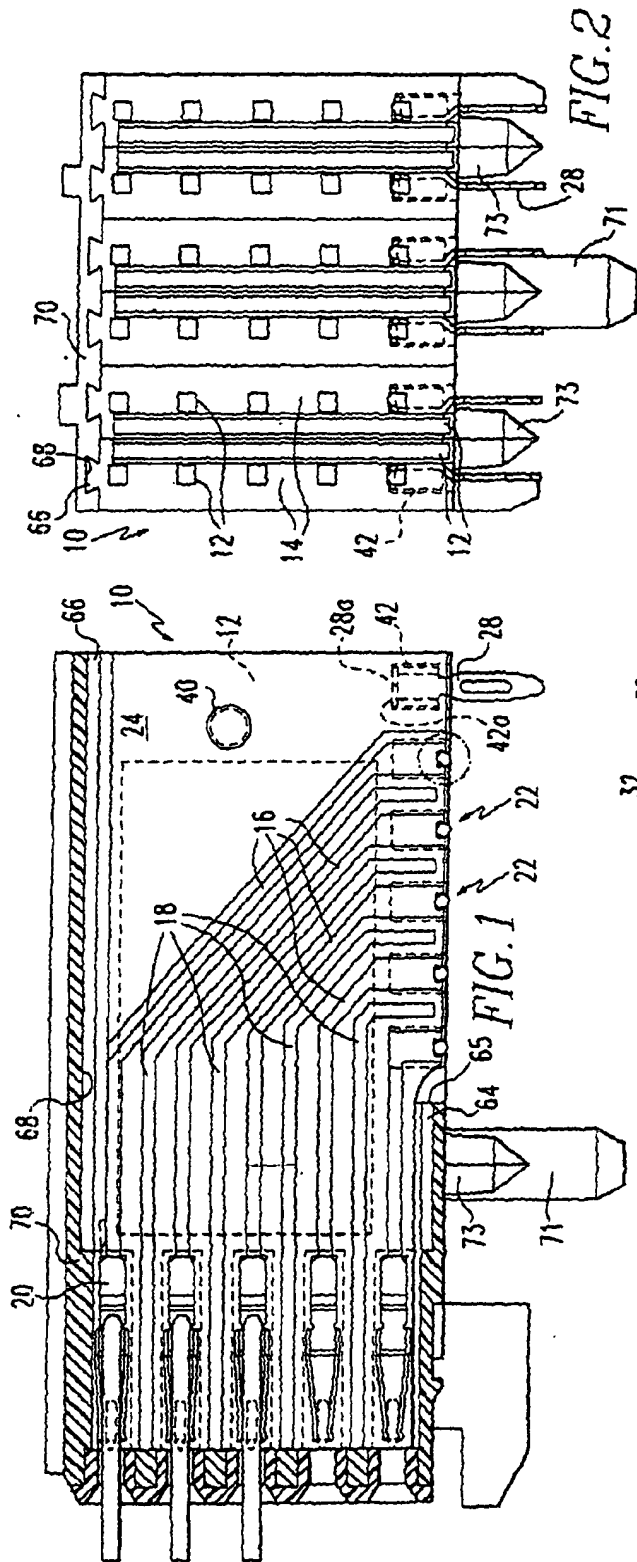

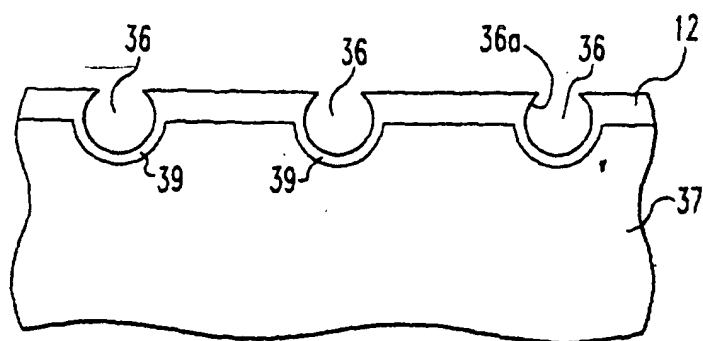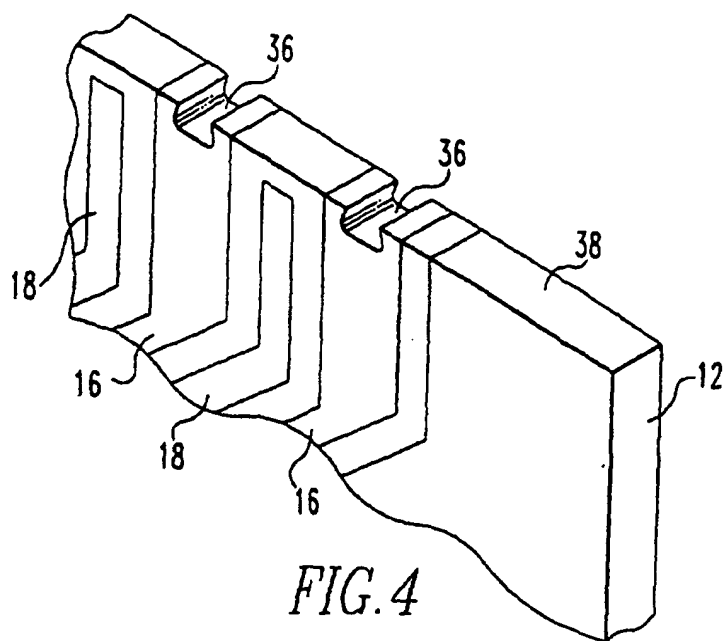

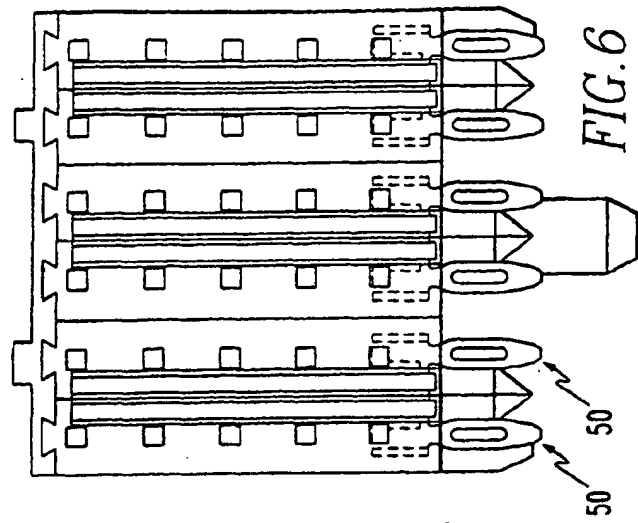


FIG. 6

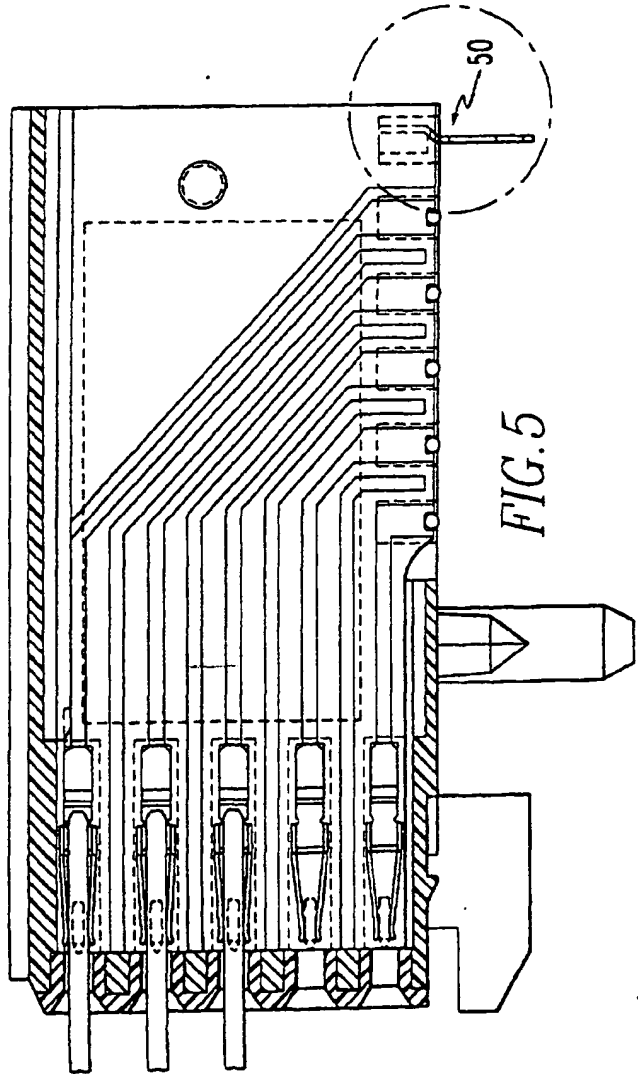


FIG. 5






FIG. 5a

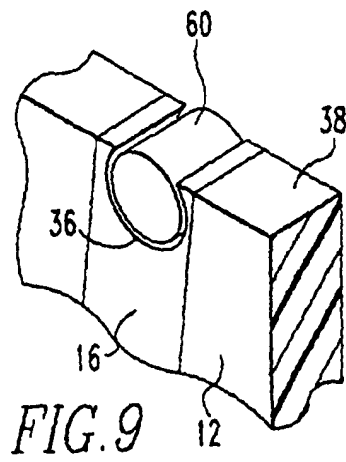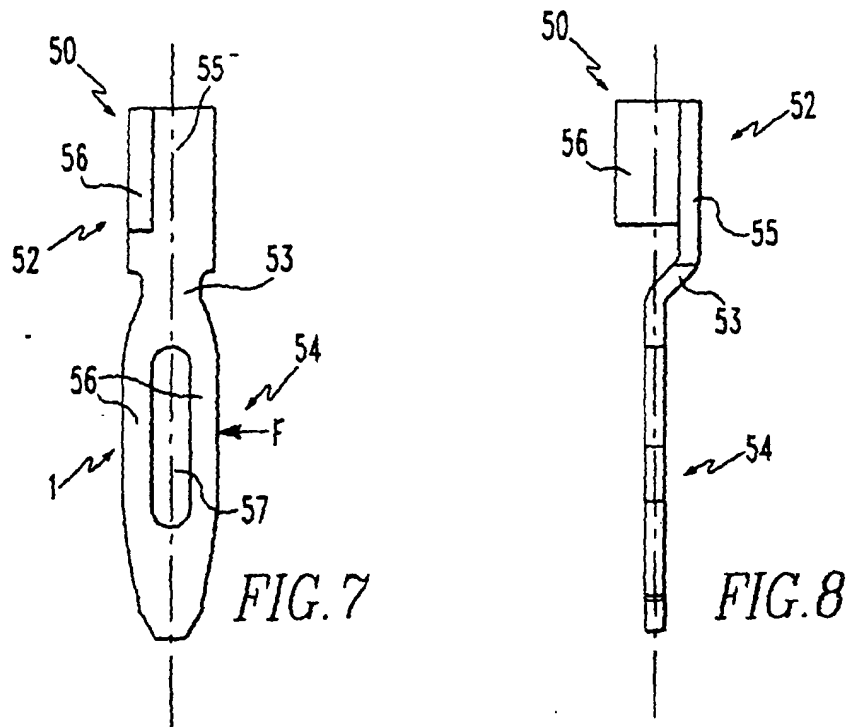

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.